

# SRD650 package content



- robust boot cable



- Stylus



- Stylus Bungee Cord



- Wrist Strap



- Standard battery 1100mAh



- Power adaptor with regional plugs  
( English version comes with 3 plugs, Sim. Ch and Tra. Ch version comes with 1 plug)

- HT650  
(with battery door, TP protection film, Warning sticker for first Time charging)

# Installing stylus & handstrap

1. Pull one side of the bungee cord through the hole at the stylus



2. Pull the other side of the bungee cord through the hole at the terminal

3. Pull one side of the handstrap through the hole at the terminal



## Install the Battery Pack

1. Turn the switch cover latch and lift the battery cover away from the Handy Terminal.



2. Insert the battery pack into the battery compartment with the label facing out, and ensuring the battery snaps into place.



3. Replace the battery cover by insert the top first, switch lock the battery cover latch to secure the cover to the Handy Terminal.



Fig V

# Overview



• Scanner Indicator

• Charging Indicator

• Power Key

- Preloaded apps in kiosk mode environment
- Displayed on 2.4" TFT qVGA (240x320) LCD

• Large Front side Scan Key

• 22 keys with Function mode and Alpha input


# Overview

- 1D Linear Laser Scanner



- Handstrap

- Stylus

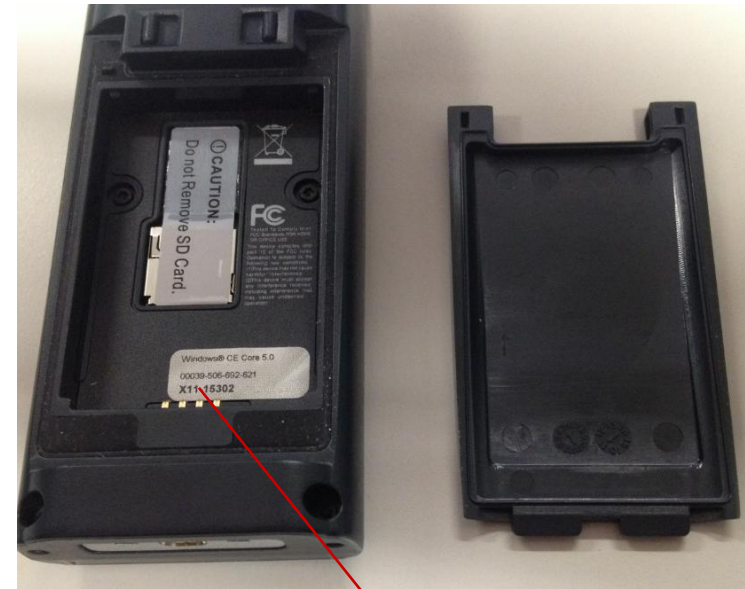

- Battery contact pins, in the battery compartment

- Charging & Communication connector



# USB cradle



- Battery Charger indicator, for second battery
  - Red : Charging
  - Green : Fully charged

- Cradle Power on indicator

- Second Battery charger (For both standard/Ext. Batteries)



- For Power adaptor

- For USB communication

# SRD650 USB cradle


## Package content



- USB cradle with Battery charger  
5000-900009G








- USB communication Cable








- screws to fix cradle on objects






# SRD650 Accessories List

	Part Number	Description	Photos
1	383642G	Stylus Bungee Cord	 A black bungee cord with loops at both ends, used for securing a stylus.
2	5500-900012G	Stylus	 A black and silver stylus with a fine tip.
3	5500-900013G	Wrist Strap with stylus bag	 A black wrist strap with a small pouch attached, designed to hold a stylus.
4	1400-900018G	Standard battery pack 1100mAH	 A black rectangular battery pack with a label on top.
5	5500-900014G	Standard battery door	 A black plastic battery door with a latch mechanism.

# SRD650 Accessories List

	Part Number	Description	Photos
6	1400-900019G	Extended Battery pack 1840mAH	
7	5500-900015G	Extended Battery door	
8	1550-900071G	USB Communication Cable	
9	1550-900072G	USB cable	
10	1010-900015G	Power adaptor pack with US CN EU UK plugs	

# SRD 650 Accessories List

	Part Number	Description	Photos
11	1010-900016G	US Plugs pack	
12	1010-900017G	China Plugs pack	
13	1010-900018G	EU Plugs pack	
14	1010-900019G	UK Plugs pack	
15	5000-900009G	Single Slot USB cradle (Cradle, QRG, 2 screws, USB com. cable)	



- Main menu, with options
  - Worker
  - Settings

- Worker-menu with 2 sub options and application buttons

• Select "Settings"

• Select "Diagnose"



• Inspect/adjust Wifi.  
(if terminal has WiFi on-board)


• Start communication to PC  
(using Microsoft's Mobile  
Device Centre, MDC)

• Inspect/adjust barcode  
scanner

• Warm reboot the terminal

• Select "Settings"

• Select "Control"

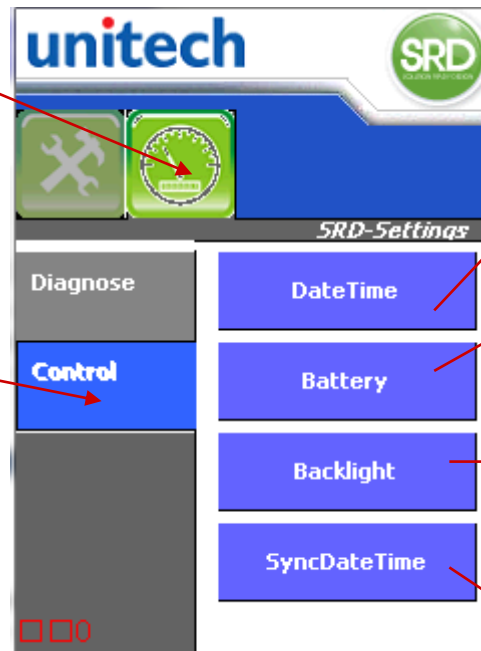

• Manually set date and time


• Adjust power properties

• Adjust Backlight properties

• Automatically set date and time. The terminal needs to "connected"

• Select "Worker"

• Select "Worker2"

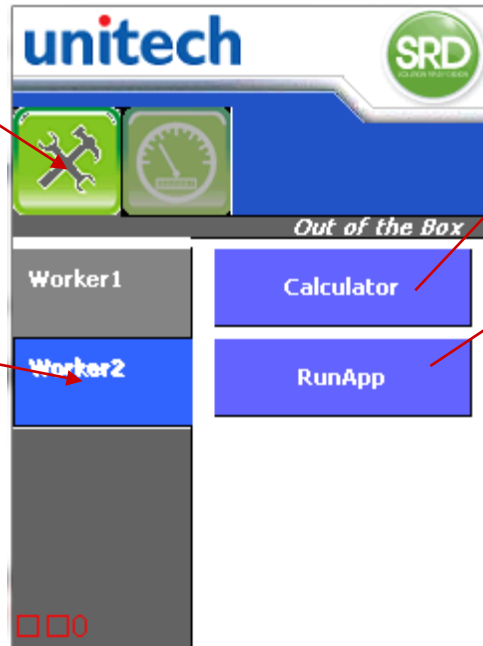

• Calculator as usefull app to an operator

• .....

• Select "Worker"

• Select "Worker1"



• Sample app "Asset" tracking

• Sample app "Warehouse" Goods out

• On screen suspend

